

Wood heating

Logs and pellets

2017 • 2018

made in
France
ISO 14001 CERTIFIED

INVICTA

Plus beau. Plus chaud. Moins cher.

N°1 IN EUROPE



04		Invicta, European leader in wood burning stoves.
06		Beautiful. Comfortable. Affordable.
12		Invicta'sûr.
14		Choose your fuel wisely.
16		Choose your stove wisely.
18		Take full advantage of your stove.
20		Favourites.
30		Hybrid stoves.
36		Ductable stoves.
48		Cast iron stoves.
94		Steel stoves.
102		Pellet stoves.
114		Wood cooker.
115		Accessories.
116		Comparative tables.

Invicta, European leader in wood burning stoves.

Cast iron, made in France

made in
france

Invicta, French foundry and enamel plants, have been established since 1924 in Donchery in the French Champagne-Ardenne region. With an annual production of 170,000 wood-burning appliances, the group is No. 1 in Europe. Invicta manages the entire production process: research and development, design, COFRAC certified laboratory for testing, foundry, enamel plant, Heating treatments, marketing and distribution. Invicta designs and manufactures a wide range of appliances, while innovating on a yearly basis.



INVICTA



The benchmark brand

Also famous for its advertisements, over the years Invicta has become the benchmark brand in the wood burning stove sector. In 2016, Invicta opened its pilot retail store in the heart of Paris, which will showcase the brand's most emblematic wood burning products... and a lot more.

Diverse expertise

Invicta's expertise has spread to many sectors: wood burning stoves, hybrid stoves, pellet stoves, hearths and inserts for fireplaces, but also barbecues, cast iron cookware, decoration and furniture.



Research and innovation

Optimizing, innovating and revolutionizing are the three watchwords at Invicta's R&D division. Some innovations conceived by Invicta, like the post combustion system and reverse combustion, have greatly contributed to the optimization of energy performance. Others, like the Air-control technology, improve the user experience by providing better control of the burn rate. The technical team at Invicta works day after day to create more environmentally friendly products, just as our customers expect.



An ecofriendly approach



ISO 14001 CERTIFIED

flamme
VERTE

Le label
du chauffage
au bois




Invicta continually improves the energy performance of its wood heating appliances, set in motion by creation of the Flamme verte label. The 6 or 7 star rating established in January 2015 encourages companies to manufacture environmentally friendly products. The COFRAC certified Invicta laboratory conducts systematic quantitative tests (performance, CO rate, dust concentration) on new models. The majority of our brand's appliances are Flamme verte 5, 6 or 7 stars. Invicta's ISO 14001 certification is further proof, if needed, of its commitment to protecting.

Partner of Ademe

Initiated by ADEME, a program to study and measure emissions generated by the use of biomass has been established to evaluate the nature and quantity of gaseous pollutants, as well as their particle size and residual particle distribution. This program aims to improve combustion and invites scientists from the Management of Risk and the Environment Laboratory of the University of Haute-Alsace and Invicta. This research is part of the Invicta approach, and naturally Invicta's Research and Development team is very involved there.





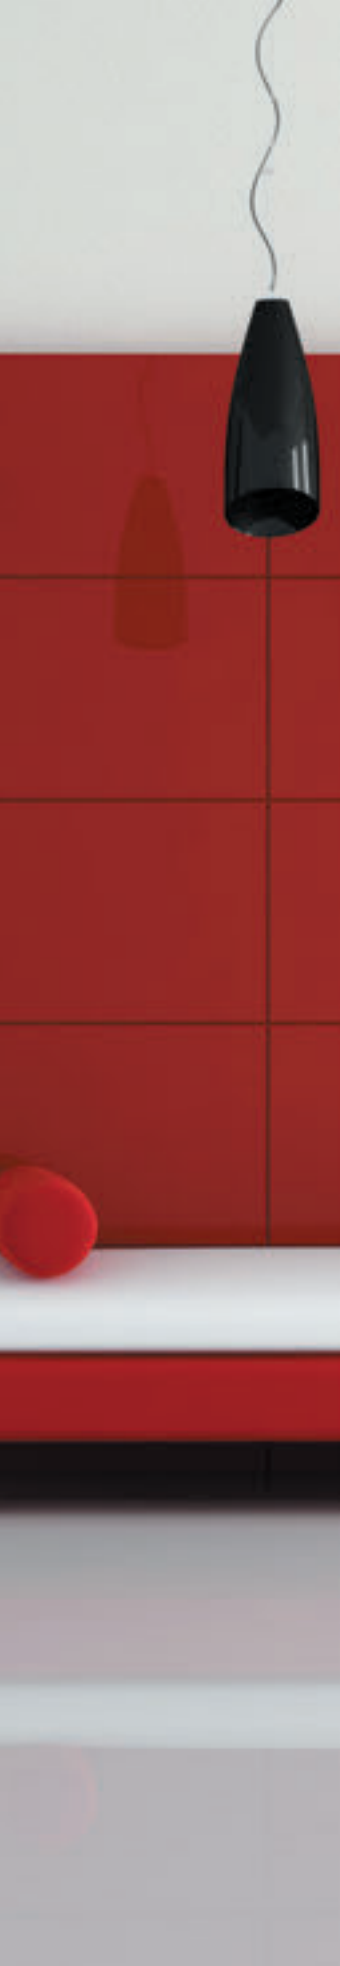

Beautiful.

A true innovator, Invicta revisited the wood burning stove, developing new, cleaner product lines that satisfy your sense of interior design, with a modern twist. This vision combines sleek design with accessibility, and is perfectly in tune with the times. Invicta's approach is part of what has come to be known as "**democratic design**".

This approach is based on five pillars:

Form: it is the quality of the line, the sketch, that makes the stove a complete aesthetic object. It adds style to any home. The stove becomes the heart of the home, and the central decorative element. This is obviously the most common meaning of the word design.

Function: Invicta stoves are perfectly designed, not only in its aesthetic dimensions, but also in its functionality. Performance, efficiency and usability guaranteed. And they're ergonomic, that is to say, optimized for a natural and intuitive use.

Quality: while remaining accessible, Invicta wood burning stoves have a level of quality that is recognized worldwide. They are made in France, in the Ardennes. The quality level is controlled at every stage to be unfaltering.

Sustainability: from the stove's conception Invicta designers never lose sight of the sustainability of the appliance throughout its life cycle. The materials are recyclable, and the fuel is the most abundant source of renewable energy in France. Durability is an integral part of the design.

And evidently **the price**.

Comfortable.

For nearly a century, Invicta has been learning to tame the heat.

The first step is the optimization of the wood burning chamber: the ideal proportions are passed down by Ironmasters through word of mouth, until finally Invicta engineers and designers set about refining them continually, to be adapted to new forms, while improving the performance and heating power of their stoves.

The next step is research of combustion characteristics: the nature of fuel, optimization of air circuit, analysis of gases emitted, study of their residues and further technological innovations (post combustion, reverse combustion, Air-Control, dual log and pellet stoves).

But the advanced management of heat is born in the Invicta foundry, with its exceptional qualities of its cast iron: excellent thermal conductivity, remarkable inertia. It will keep and distribute heat radiantly and consistently. It withstands extreme temperatures and heat distortion. And last, but certainly not least: a cast iron stove is 100% recyclable.





BEAUTIFUL. COMFORTABLE. AFFORDABLE.

INVICTA

9

Gaya Ardoise p.80



Affordable.

For Invicta, design is only meaningful if it is accessible to the greatest number of people.

This has been our vocation for decades. Invicta is committed day to day to making this dream possible, so that everyone can afford the best in design and performance. With this philosophy, Invicta Group has become the European leader in wood burning stoves. Whatever your budget, you will find an Invicta stove with both excellent design and high performance, and watching it in your living room will be a daily joy.

This universal affordability is so central that it has become the signature of the brand.
Invicta. Beautiful. Comfortable. Affordable.

For the starting-up of its stoves, INVICTA creates

INVICTA'SÛR



It's easier

Simply register with us to receive our complete service:

- On the website www.invicta.fr services section
- Or simply by calling **N°Vert 0 809 10 00 13** only in France.

APPEL GRATUIT DEPUIS UN POSTE FIXE

It's faster

After registration, the Invicta'sûr independent contractor will call you within 5 days (excluding weekends and holidays).

After validation, the intervention takes place within 15 working days.

It's more reliable

The manufacturer implement the starting up of your stove.

It's safer

Upon arrival, the Invicta technician makes sure your installation complies with regulations.

It's more comfortable

The technician calibrates your stove taking into account your needs, and the comfort you require.

* Please check list of independent contractors on our website Invicta.fr Services section.

Compliance
controls

First
usage

Programming

Training
of use

Maintenance
advice

SERVICE ONLY
AVAILABLE
IN FRANCE



Choose your fuel wisely

You have decided to purchase a wood burning stove combining affordability, environmental aspects and performance. But the question remains "what fuel, and what stove, best meets your heating needs?" Logs or pellets? Here is a comparison of the two families of stoves to help you choose the most suitable.



Pellet stoves: performance and practicality

Autonomy. With their large capacity hopper, pellet stoves do not require regular supply. In addition, they are programmable and certain models are even remotely controllable.

Constant comfort. Simple to use, they produce a soft and constant heat over a long period without any effort on your part to keep the flame burning. Pellet stove technology combines efficiency and practicality, bringing you freedom and flexibility.

Fuel quality. The pellets are composed of sawdust and wood residue, making an excellent fuel. With their high energy performance, they produce an efficient and comfortable heat.

High performance. Reaching 80% to more than 90% efficiency, pellet stoves usually exceed the performance of traditional log systems. They have been awarded the "Flamme verte" label. Their autonomy is also higher. Some Invicta models have a feed hopper of 22 kg, allowing you to enjoy up to 36 hours of heat.

Higher purchase price and utilization cost. The initial investment is higher for pellet stoves. In addition, the fuel, pellets, is more expensive than logs.



Log stoves: savings, aesthetics and enjoyment

Atmosphere. Very popular, especially with families, log stoves continue to captivate through the sublime spectacle of fire they offer. Contemporary appliances uniting design and pleasure, Invicta log stoves fit perfectly in any home and come in many forms for a flawlessly warm atmosphere. Log stoves run silently thanks to their natural convection, leaving you to enjoy the crackling of flames.

Competitive price. Log stoves are cheaper to use because the fuel is more widely available than pellets. In terms of running costs, they are the most competitive stoves on the market. Meeting the requirements of the "Green Flame" label, log stoves provide up to 80% energy efficiency. Note that these appliances diffuse heat quickly and do not require electricity to operate.

A variety of log sizes. Depending on their size, Invicta wood burning stoves can accommodate different log lengths - 25, 33, or 50 cm. Smaller logs will however provide optimal performance. Two 25cm logs have a higher calorific value than one 50cm log.

Autonomy. Unlike pellet stoves, autonomy is limited to a few hours without human intervention. There is an extended burning mode to allow you to easily restart the stove after several hours.

Authenticity. If you are looking for a unique and intense experience, the log stove is for you. As long as you don't mind rekindling the flame from time to time!

To sum up...

	Logs	Pellets
Stove cost	🔥🔥	🔥🔥🔥
Cost of fuel	🔥	🔥🔥
Maintenance cost	🔥	🔥🔥
Efficiency	🔥🔥	🔥🔥🔥
Autonomy	🔥🔥	🔥🔥🔥
Ease of use	🔥🔥	🔥🔥🔥
Beauty of the flame	🔥🔥🔥	🔥🔥



Invicta has a solution for the indecisive persons

Become a master of fire by opting for a dual fuel burner! Invicta offers you a range of products that combines the advantages of both fuels: the dual fuel stoves (MIX, AKIMIX and CAROLO MIX). With an autonomy of 12 to 17 hours with pellets and a wood burning chamber which takes logs up to 38cm, you will be free to choose between ease of use and the warmth of a wood fire.

Choose your Invicta's stove wisely.

Design

Contemporary, vintage, rectangular, oval, original, traditional, anthracite, ivory enamel or bright red... Choosing an Invicta wood burning stove is as easy as falling in love. One thing is sure, this decorative object will not go unnoticed in your living room. So let your eyes guide you, and let out your inner interior designer!



Performance

Invicta stoves offer a wide range of thermal performance. In this catalogue we've highlighting the heating Heating, the optimum power and the power range. These characteristics will guide your choice towards the ideal stove. The Flamme Verte ranking, with 5, 6 or 7 stars, will guide you to the most efficient and environmentally friendly appliances.

flamme
VERTE

Le label
du chauffage
au bois



Sizing and installation

A good wood burning appliance is primarily a stove, a fireplace, or a fireplace insert perfectly adapted to your needs. Do not hesitate to contact an industry professional, a certified steward of the environment. They will help choose the ideal product in terms of heating volume, insulation and configuration for your home, or possibly the finer points of RT2012 constructions... They will determine a suitable location based on the flue, the size of the appliance and safety distances required.



Price

Price is of course an important criterion. When you set your budget, remember to take into account any applicable subsidies. And remember, you won't be changing your Invicta wood stove every 5 or 10 years, this is a long term investment.

Technical features

POST COMBUSTION

EXCLUSIVE POST-COMBUSTION SYSTEM

Injection of pre-heated air into the combustion chamber. The additional air arrival by the back of the refox enables the re-lighting of combustion residues, dust and hydrocarbon thus obtaining a complete combustion and a reduced pollution emission.

SECONDARY AIR WITH DOUBLE FUNCTION

Secondary air protects the glass against smoke and soot deposit. It optimizes the combustion of volatile materials.

MORE EFFECTIVE PRIMARY-AIR CONTROL

The lighting booster facilitates the starting of the fire. More precision and flexibility to choose the fire pace.

AIR-TIGHT STOVE Compatible RT 2012

AIR-TIGHT STOVE WITH POSSIBLE CONNECTION OF AIR SUPPLY

Compatible with sustainable houses / centralized fresh air supply from the duct:

- no outside air passage in the room.
- possibility to connect an air supply duct drawing fresh air from the outside or crawl space.

100% CAST- IRON

100 % CAST-IRON APPAREL

Long-life material and 100 % recyclable / ideal material for heating

- excellent thermal conductivity, gentle heat and high inertia : stores the heat and releases it progressively.

AIR CONTROL

CENTRALIZED MANUAL ADJUSTEMENT OF AIR DISTRIBUTION WITH SINGLE CONTROL

Modulation of the fire pace from mini to maxi with collector / distributor technology meeting the necessary balance between the different air flows :

- simple and balanced management of whole air distribution : primary, secondary and post-combustion
- better control of the fire pace : mini, normal and maximum
- better control of wood consumption
- more effective and regular airwash (secondary air)
- cleaner and better combustion
- possibility to stop completely the air flow during extended interruption of the apparel.

refractory CONCRETE BRICKS

Chamotte BRICK COVER

FIREBOX COVERED WITH CHAMOTTE BRICKS OR REFRACTORY CONCRETE BRICKS

Faster warming-up of the hearth / contribute to reduce CO level and dust emissions, and maintain the glass clean.

Take full advantage of your stove

1. Consider fuel quality

Whether you use logs, pellets or wood chips, you won't get the most out of your stove without a quality fuel. If it is unsuitable or of poor quality, the fuel will be the primary cause of issues with your stove, of degraded energy performance and outside air pollution.

Logs

Suitable wood species

There are two main families of wood classified according to their density:

- > The hardwoods (oak, beech, ash, hornbeam, alder, maple, elm, walnut, fruit trees...)
- > The softwoods (spruce, fir, pine, larch) and soft deciduous (poplar, willow, birch, linden...)

Logs of hardwood, denser, and with greater calorific value are recommended for domestic stoves, with the exception of chestnut which spits as it burns.

Tender hardwoods and softwoods burn too quickly. The resinous softwoods may, in addition, clog the pipes and the appliance itself. For a more intense flame or to rekindle the fire, choose light woods such as poplar or willow, whose combustion is faster.

Dry wood

The moisture content of the wood is an essential factor. Dry wood, ready for burning, (less than 20% moisture relative to gross weight) has twice the energy output of freshly cut wood (45% moisture relative to gross weight)! The more water the wood contains, the more evaporation takes useful energy away, and the less heat is produced.

Freshly cut firewood and packaged in stacks should be stored for a minimum of two years for optimal combustion. Cut, split and stored under shelter in a well ventilated area, the wood dries faster. When improperly stored, wood deteriorates quickly.



TIP

Split wood before storing it, this helps with its drying. In addition, small logs emit fewer particles than bigger logs.

Pellets

Pellets are produced by simple compression of sawdust, without chemical additives. Ultra-compact, they allow high yields and high autonomy. Easy to transport, store and use, they are suitable for all housing types. As with logs, pellets must be stored in a dry space. Their humidity must be less than 10%. They are usually sold in bags of 15 kg.



2. Learn to start your fire

Before starting your fire, make sure the fresh air intake near the appliance is not blocked. Empty the ash pan, open the air supply dampers. Recent studies have identified a **reverse ignition process** that can greatly reduce the emissions of fine particles. To do this, first place the thickest logs underneath and then place smaller logs above. Finish with small pieces of dry wood (kindling) and a firelighter. Check the draw and the air intake dampers before lighting the firelighter, then close the door.

TIP

Wait at least 10 minutes before lowering the air intakes.

3. Adjust the chimney draught correctly

An optimized draught saves fuel and reduces pollution. With a weak draught, fuel will not burn easily resulting in insufficient heating and a risk of smoke discharge. The appliance and the chimney may be clogged causing greater pollution. With too much draught, combustion becomes too fast, the temperature of the gas is too high. You waste energy and consume excessive wood. Depending on your appliance, you will have various settings that allow you to optimize the draught. For more information, see the operating instructions for your model.

How to tell if your settings are correct?

- > Each batch of wood should light when you place it in the appliance and keep burning.
- > The stove must not operate without blaze or you may clog the appliance and release noxious fumes into the environment.

TIP

The power of a stove depends on the amount of wood and the frequency of loading. The optimal power of a stove, expressed in kW corresponds to its wood consumption in kg every 3 hours. Example: optimal power of 12kW equates to a consumption of 4 kg of wood per hour.

4. Maintain your appliance

Use the services of qualified professionals. A well maintained appliance will save fuel, deliver better wood combustion and have better environmental performance. Your appliance and your installation will also be preserved for years to come.

Yearly maintenance is mandatory. A complete inspection of your appliance and its installation must be performed annually by a qualified person. A maintenance certificate that you should keep for 2 years will be given.

The chimney must be swept twice per year. Call a qualified professional to carry out two mechanical chimney sweepings of the smoke ducts. One of them must also be done during the heating period. Ideally, the chimney sweeping must be done from the top. Remember to ask for a sweeping certificate. Warning! Chemical sweeping is not a replacement for a mechanical sweeping.

Regularly clean your wood burning stove. A wood burning stove requires a few simple tasks that you can do yourself:

Ashes: an excess of ashes can block air supply to your fire. For the best performance from your stove, remember to empty the ash pan regularly and to dust the fire grids.

The glass: to enjoy the charm of a roaring fire, regularly clean the glass! Dirty glass reflects non-optimized combustion. A very hot burn will also clean the glass through the pyrolysis effect.

The seals: also remember to regularly check the condition of the door and glass seals. Pellet stoves require more regular maintenance, see the instructions of the appliance.

TIP

It's better to clean the glass when it's warm – it's more effective and quick. Moisten newspaper and tap it in some cold ashes. Rub the glass and repeat several times to remove all traces. Rinse with a sponge and water.



Favourites

Technological innovations, instant love for an innovative design, success with the public: Invicta presents a selection of its preferred models.

Heating
surface
25 to 85 m²

Power
range
2,5 to 7 kW

Pellets
Feed hopper: 16,5 kg



NOLA 7

With its streamlined style, this pellet stove will fit right into your home, ensuring a unique feeling of well-being.



W 465 X H 1125 X D 500 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p116)
Available in 10 kW version p.109



Black
Ref. 6418-74

Red
Ref. 6418-77

Grey
Ref. 6418-78

2-YEAR⁽¹⁾
Warranty

REMILLY

Compact and efficient, this cast iron wood stove is ideal for tight budgets. Design: Jean-Philippe Dargenton.



Anthracite
Ref. 601384

made in
france

ISO 14001 CERTIFIED



100%
CAST-
IRON

5-YEAR⁽¹⁰⁾
Warranty

W 436 X H 800 X D 364 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p116)

Heating
surface
40 to 85 m²

Power
range
4,5 to 10,5 kW

Optimum
power
7 kW
= 2.3 kg wood / hour

Maximum size
of logs
34 cm





ELO M

WHITE ENAMEL

Immerse yourself in the wonderful world of the Elo M wood-stove which promises high output and a cosy warm atmosphere. The light side of the force. The elegance and finesse of its smooth enamel front delicately balanced with the strength of its black cast-iron body.



W 500 X H 880 X D 374 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p116)

Heating
surface
25 to 60 m²

Power
range
3 to 7,5 kW

Optimum
power
5 kW
= 1.6 kg wood / hour

Maximum size
of logs
33 cm



ISO 14001 CERTIFIED



★★★★★★



ELO M
White enamel
Ref. 6102-48



Heating
surface
75 to 170 m²

Power
range
9,5 to 21 kW

Optimum
power
14 kW
= 4.6 kg wood / hour

Maximum size
of logs
50 cm




POW-WOW

Like a totem in the living room, this large format stove celebrates the sacred spirit of fire. Its modern and ethnic lines give him an undeniable charm. Efficient by extreme cold, this all cast-iron stove can work with open doors to enjoy a traditional fire. Design: Bernard Dequet.

H 1895 x diameter on floor 817 mm
Flue diameter 200 mm. Top flue.
(Comparative tables: p116)



Anthracite
Ref. 6152-44



KAORI



Anthracite
Ref. 6478-44

Entirely made from cast iron, this simple and modern looking stove, offers great performance. Its style and its rounded lines magnify the dancing flames. Elegant on its 4 cast iron feet, Kaori will appeal to the unconditional ones of understated charm. Design: Bernard Dequet.

W 754 X H 773 X D 404 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p116)



Heating
surface
50 to 110 m²

Power
range
6 to 13,5 kW

Optimum
power
9 kW
= 3 kg wood / hour

Maximum size
of logs
58 cm



FIFTY ARCHE

Invite the spirit and creativity of happy days into your home! Inspired by the aesthetic influences of the 50's, this vintage woodstove also send you into the future through its high technological and environmental performances.
Design: Jean-Philippe Dargenton.



W 922 X H 755 X D 442,5 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p116)



Anthracite
Ref. 6479-44



Ivory enamel
Ref. 6479-46



Red enamel
Ref. 6479-47



Heating surface
55 to 120 m²

Power range
6,5 to 15 kW

Optimum power
10 kW
= 3.3 kg wood / hour

Maximum size of logs
60 cm

Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
40 cm

ARATOS

Aratos is drawing up the blueprint of a modern and efficiently heated house. There all is warmth and beauty. Comfort, peace and pleasure. Design: Bernard Dequet.



Anthracite
Ref. 6453-44

W 527 X H 1050 X D 453 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p116)

made in
france
ISO 14001 CERTIFIED



POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹⁰⁾
Warranty



Hybrid stoves

Invicta offers a solution unique to the market combining the advantages of the two types of fuel. Logs or pellets - it's up to you. This brand new dual fuel concept functions like a classic log burner stove but also comes with a pellet hopper. You can benefit from the heat and visual effect of a wood fire when you are home and maintain a gentle temperature during the night or if you are away by using pellets. In addition, Invicta mixed log or pellet stoves mean you are free to adjust consumption according to energy price variance, opting to use logs, for example, if there is a rise in the price of pellets.

AKIMIX

Master the fire and choose the most suitable fuel whenever desired. Imagine... The warmth and beauty of a log fire enliven your evenings with your family. Then, you can shift over to the pellet mode to keep a gentle temperature during the nights. Design: Bernard Dequet.

Heating
surface

40 to 85 m²

Power
range pellets

3,5 to 6,5 kW

Optimum
power logs

7 kW

= 2.3 kg wood / hour

Maximum size
of logs

38 cm

W 766 X H 851 X D 372 mm

Flue diameter 150 mm. Top flue or rear flue.

(Comparative tables: p117)



Anthracite
Ref. 6190-44

DUAL
wood logs
& pellets

POST
COMBUSTION

SILENT
natural
convection

100%
CAST-
IRON

5-YEAR⁽¹⁸⁾
Warranty





Heating
surface
30 to 70 m²

Power
range pellets
2,5 to 6,5 kW

Optimum
power logs
6 kW
= 2 kg wood / hour

Maximum size
of logs
38 cm

MIX

Master the fire! Orchestrate your heating mode by selecting the economic advantage of wood logs or convenience of pellets. Silent, this stove is easy to use and yet, plays a sweet melody of comfort. Design: Bernard Dequet.

W 805 X H 980 X D 463 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p117)

made in
france
ISO 14001 CERTIFIED



Anthracite
Ref. 6196-44

DUAL wood logs & pellets	AIR-TIGHT STOVE Compatible RT 2012
AIR CONTROL	POST COMBUSTION
SILENT natural convection	100% CAST- IRON
Chamotte BRICK COVER	5-YEAR ⁽¹³⁾ Warranty

CAROLO MIX



Anthracite
Ref. 6495-44

Can't decide between the benefits of a logs stove and a pellet stove? Invicta offers the Carolo Mix. This stove combines the advantages of both fuels. Simple to use, it switches easily from one mode to another. With a warm design, it will charm you. Design: Jean-Philippe Dargent.

W 799 X H 690 X D 434 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p117)



DUAL
wood logs
& pellets

POST
COMBUSTION

100%
CAST-
IRON

SILENT
natural
convection

5-YEAR[®]
Warranty

Heating
surface
40 to 85 m²

Power
range pellets
3,5 to 6,5 kW

Optimum
power logs
7 kW
= 2.3 kg wood / hour

Maximum size
of logs
35 cm



Ductable stoves

The ductable wood stove provides incredible thermal comfort in your home. It does not suck the air from the room where it is located, but receives it from the outside or a crawl space via a fresh air intake located on the bottom of the stove. Ideal for low energy houses, it can achieve significant energy savings, and thus reduce, significantly, your heating bills.





ALTARA +

Elegant and flamboyant, the Altara + is dressed to impress. With its stainless steel handle and refractory concrete brick side, it will shine in any living room. Design: Bernard Dequet.



Altara

Chamotte
BRICK COVER



Altara +

refractory
CONCRETE
BRICKS

W 450 X H 1650 X D 450 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p117)



Altara
Anthracite
Ref. 6103-44

Altara +
Anthracite
Ref. 6103-14



<p>Heating surface</p> <p>40 to 85 m²</p>
<p>Power range</p> <p>4,5 to 10,5 kW</p>
<p>Optimum power</p> <p>7 kW</p> <p>= 2.3 kg wood / hour</p>
<p>Maximum size of logs</p> <p>33 cm</p>



EASILY
ACCESSIBLE
HANDLE





Heating
surface
30 to 70 m²

Power
range
4 to 9 kW

Optimum
power
6 kW
= 2 kg wood / hour

Maximum size
of logs
33 cm

ALCANDE

Beautiful panorama, unique experience of comfort, warm moments... Now boarding to pleasure and comfort of wood heating. Design: Bernard Dequet.



Anthracite
Ref. 6109-44

W 450 X H 1200 X D 482,5 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p117)



AIR-TIGHT STOVE <small>Compatible RT 2012</small>	AIR CONTROL
POST COMBUSTION	100% CAST- IRON
Chamotte BRICK COVER	5-YEAR ⁽¹⁾ Warranty

ALCOR

Alcor promises you a bright future. Its full panoramic glass and elegant design give an undeniable brilliance to the fire show. Design: Bernard Dequet.



Anthracite
Ref. 6107-44

W 450 X H 1200 X D 450 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p117)



Heating
surface
30 to 70 m²

Power
range
4 to 9 kW

Optimum
power
6 kW
= 2 kg wood / hour

Maximum size
of logs
33 cm





Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
30 cm

ÎLOT

With its amazing look, Îlot is perfect to create a relaxing and cozy atmosphere with subdued lighting. In addition to a mesmerizing fire, Îlot offers very high environmental performances with low emissions. Design: Arnaud Lapierre.



Anthracite
Ref. 6169-44

W 613 X H 716 X D 619 mm
Flue diameter 150 mm. Rear flue.
(Comparative tables: p117)



REVERSED
COMBUSTION

AIR-TIGHT
STOVE
Compatible RT 2012

5-YEAR⁽¹³⁾
Warranty

WABI

The chic Wabi stove cheers you up during the cold season and brings to your home a modern touch with soothing effects. Design: Bernard Dequet.



W 400 X H 1120 X D 400 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p117)



Heating surface
30 to 70 m²


Power range
4 to 9 kW

Optimum power
6 kW
= 2 kg wood / hour

Maximum size of logs
30 cm



Anthracite
Ref. 6122-44



RÉVA

Magical mirror! Réva wood stove adds a touch of instant style by reflecting light. With a fire inside, the mirror no longer reflects and reveals the beauty of the flames. Come to the other side of the mirror and discover Réva's technological and energetic powers. Design: Bernard Dequet.



Bench option. Ref. 6961-31

W 540 X H 620 X D 408 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p118)



Heating surface
25 to 60 m²

Power range
3 to 7,5 kW

Optimum power
5 kW
= 1.6 kg wood / hour

Maximum size of logs
37 cm



Anthracite
Ref. 6131-04





Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
38 cm

ORENSE

Harmonious and subtle design. The seductive Orense stove let us see generous shapes and gracious curves. State of the art stove, Orense is the perfect harmony between design and functionality. Design: Jean-Philippe Dargent.

Finish
chrome
handles




Anthracite
Ref. 6194-44


Chrome handles
Ref. 6194-48

AIR-TIGHT
STOVE
Compatible RT 2012

AIR
CONTROL

POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹⁾
Warranty

made in
france
ISO 14001 CERTIFIED



W 550 X H 1000 X D 590 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p118)

MOAÏ

Inspired by the outline of the Easter Island statues, Moaï wood stove and its angular glass offer a magnificent view of the flames. According to the tradition, each Moaï is responsible for the part of the world he is looking at. This cast-iron god protects every home from the outside cold thanks to its technical features and its beautiful energetic and environmental performances. Design: Bernard Dequet.

W 560 X H 1439 X D 457 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p118)



Anthracite
Ref. 6142-44




Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
35 cm



MANA

Slender version of the Moaï stove, the Mana diffuses positive energy in every home. Beyond its spiritual and aesthetic strength, Mana brings together an anthology of technical and energetic qualities. Design: Bernard Dequet.

W 560 X H 1883 X D 457 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p118)



Anthracite
Ref. 6143-44



Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
35 cm





ELO S

Welcome to the world of Elo!

Elo S is compact and highly efficient, designed to fit comfortably into an existing fireplace.



Heating surface
25 to 60 m²

Power range
3 to 7,5 kW

Optimum power
5 kW
= 1.6 kg wood / hour

Maximum size of logs
33 cm

W 513 X H 720 X D 374 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p118)




ELO S
Anthracite
Ref. 6102-14

ELO L

Welcome to the warm and comfortable world of Elo! With efficient performance and futuristic design, the Elo wood-stove will transport you to the heights of comfort and satisfaction.



Heating surface
25 to 60 m²

Power range
3 to 7,5 kW

Optimum power
5 kW
= 1.6 kg wood / hour

Maximum size of logs
33 cm

W 500 X H 920 X D 374 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p118)




ELO L
Anthracite
Ref. 6102-44

Cast iron stoves

With excellent thermal conductivity and high inertia: the cast iron is the ideal material for heating appliances. The heat developed by the combustion of the wood is stored by the cast iron, and restored to the homes in the best possible manner thanks to the regularity of emission. Its excellent castability gives it that famous peach skin or velvety finish. This material is 100% recyclable. Invicta cast iron stoves are decorative objects in their own right, and are equally appropriate in a rustic or contemporary interior. Finally, beyond their robust appearance, they demonstrate incredible longevity.







Heating
surface
40 to 85 m²

Power
range
4,5 to 10,5 kW

Optimum
power
7 kW
= 2.3 kg wood / hour

Maximum size
of logs
34 cm

IWAKI

Zen attitude... Iwaki breathes harmony and serenity to your home. Feel all the positive energy that emerges from this well-proportioned stove.
Design: Bernard Dequet.



Anthracite
Ref. 6106-44

W 372 X H 883 X D 394 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p118)



POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹³⁾
Warranty

IWAKI ON BASE

WITH SIDE GLASSES

Iwaki climbs up a notch and sits on a solid stand. It seeks and finds an opening, offering a 180° view of the flames. In short, it adds volumes to your heating experience. Design: Bernard Dequet.

W 360 X H 1023 X D 372 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p119)



Heating surface
40 to 85 m²


Power range
4,5 to 10,5 kW

Optimum power
7 kW
= 2.3 kg wood / hour

Maximum size of logs
34 cm



Anthracite
Ref. 6106-24



OKINO

Warm yourself in peace and enjoy the harmonious atmosphere created by this Japanese inspiration stove. Design: Bernard Dequet

W 402 X H 891 X D 402 mm

Flue diameter 150 mm. Top flue.

(Comparative tables: p119)



Heating surface
40 to 85 m²


Power range
4,5 to 10,5 kW

Optimum power
7 kW
= 2.3 kg wood / hour

Maximum size of logs
34 cm



Anthracite
Ref. 6105-44



SEDAN S

The little newcomer ! Classic and timeless, the Sedan S has just as much to offer as the larger ones and easily fits in your home. Design: Jean-Philippe Dargenton.



W 500 X H 627 X D 443 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p119)



Anthracite
Ref. 9450-44

Black enamel
Ref. 9450-43

Grey enamel
Ref. 9450-48

Red enamel
Ref. 9450-47

Ivory enamel
Ref. 9450-46

POST
COMBUSTION

Chamotte
BRICK COVER

100%
CAST-
IRON

5-YEAR¹⁰
Warranty

Heating
surface
25 to 60 m²

Power
range
3 to 7,5 kW

Optimum
power
5 kW
= 1.6 kg wood / hour

Maximum size
of logs
30 cm



Heating
surface
30 to 75 m²

Power
range
4 to 9 kW

Optimum
power
6 kW
= 2 kg wood / hour

Maximum size
of logs
50 cm



NORIK

Set-up a paradise area and give in to the delights and wellness provided by this very modern stove, Norik.
Design: Jean-Philippe Dargenton.



Anthracite
Ref. 9121-44

W 620 X H 674 X D 465 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p119)





Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
40 cm

LUDIA

The curtain rises on a magnificent scene starring the dancing flames. Ludia, a high-performance actor of your heating scenario, attracts admiring gazes with its original cast iron sculptured look. Design: Jean-Philippe Dargenton.



Anthracite
Ref. 6123-44

W 536 X H 1035 X D 437 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p119)



MANDRA

DESIGNED FOR FIREPLACES

Imagine this compact cast-iron stove directly installed in your fireplace. Thanks to this updated wood-heating classical, you enjoy a cosy warmth and a fascinating view of the fire. Design: Bernard Dequet.



W 624 X H 920 X D 408 mm
Flue diameter 150 mm. Rear flue.
(Comparative tables: p119)



Heating
surface
25 to 60 m²

Power
range
3 to 7,5 kW

Optimum
power
5 kW
= 1.6 kg wood / hour

Maximum size
of logs
32 cm



TENNESSEE

We all have a space for Tennessee wood stove at home. Its retro-style is modernized with trendy stainless steel trims. The enamelled versions, pure white, elegant black or exuberant red, will harmonize with all interior decorating ideas. Design: Bernard Dequet.

AUTOMATIC AIR REGULATION SYSTEM

This electricity-free mechanical system regulates air intake and fuel combustion according to the setting on the control knob at the side.




W 780 X H 798 X D 428 mm

Flue diameter 180 mm. Top flue or rear flue.


(Comparative tables: p119)




White enamel
Ref. 6181-48


Anthracite
Ref. 6181-44


Red enamel
Ref. 6181-47


Black enamel
Ref. 6181-43



Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
54 cm



AUTOMATIC AIR
REGULATION SYSTEM



Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
56 cm

CAROLO

Appropriately named, this cast iron stove proudly displays its French Ardennes origins. It invites you to discover magnificent flaming views and unparalleled heat. Feel free to take advantage of its generous energy performance. Design: Jean-Philippe Dargent.



Anthracite
Ref. 9162-44

W 620 X H 690 X D 439 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p119)



LA BORNE 2

This new version of La Borne, more efficient, has a post-combustion system. La Borne brilliantly leads the way to an efficient and joyous wood heating experience. Design: INVICTA création.




Heating surface
40 to 85 m²

Power range
4,5 to 10,5 kW

Optimum power
7 kW
= 2.3 kg wood / hour

Maximum size of logs
45 cm

W 548 X H 719 X D 400 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p119)



Anthracite
Ref. 6454-44

SOREL

Sorel, a timeless and efficient stove is available in several colours and will transport you back in time with its retro look. Design: Jean-Philippe Dargent.




Heating surface
40 to 100 m²

Power range
5 to 12 kW

Optimum power
8 kW
= 2.6 kg wood / hour

Maximum size of logs
65 cm

W 417 X H 1055 X D 517,5 mm
Flue diameter 97 mm. Rear flue.
(Comparative tables: p120)



Specific colours on demand.



Anthracite
Ref. 6198-44



Ivory enamel
Ref. 6198-46



Blue enamel
Ref. 6198-42



Pink



Yellow



Apple green



Bora



Orange



Red



Grey

CHÂTEL

Very efficient and compact, the Chatel stove is at home in all types of interior. Design: Jean-Philippe Dargent.

W 476 X H 830 X D 375 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p120)



Anthracite
Ref. 6137-44



Heating surface
40 to 100 m²

Power range
5 to 12 kW

Optimum power
8 kW
= 2.6 kg wood / hour

Maximum size of logs
34 cm



100%
CAST-
IRON

5-YEAR[™]
Warranty

MESNIL

Despite its small size, Mesnil elevates itself with its pedestal and high energy performance. Design: Jean-Philippe Dargent.

W 486,5 X H 986 X D 385 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p120)



Anthracite
Ref. 6136-44



Heating surface
40 to 100 m²

Power range
5 to 12 kW

Optimum power
8 kW
= 2.6 kg wood / hour

Maximum size of logs
34 cm



100%
CAST-
IRON

5-YEAR[™]
Warranty

SAMARA

This cast iron stove is small, fitting into any interior with its classic style and tiny footprint. Design: Jean-Philippe Dargenton.



Heating surface
30 to 70 m²

Power range
4 to 9 kW

Optimum power
6 kW
= 2 kg wood / hour


Maximum size of logs
50 cm

W 634 X H 644 X D 462 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p120)



Anthracite
Ref. 9148-44

ALTÉA

Welcome to the fire corner! This classic stove has received a makeover. Now equipped with a post combustion system, Altea offers excellent thermal and environmental performance. Design: Jean-Philippe Dargenton.



Heating surface
40 to 100 m²

Power range
5 to 12 kW

Optimum power
8 kW
= 2.6 kg wood / hour


Maximum size of logs
50 cm

W 644 X H 744 X D 556 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p120)



Anthracite
Ref. 9166-44

KAZAN



Anthracite
Ref. 6104-44

Directly inspired by the thermal efficiency of cast iron radiators, Kazan combines design and performance. Its fins give this stove a unique and stylish look, while enhancing energy performance with an increased heat exchange surface area. Design: Bernard Dequet.

W 652 X H 801 X D 372 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p120)



Heating
surface
50 to 110 m²

Power
range
6 to 13,5 kW

Optimum
power
9 kW
= 3 kg wood / hour

Maximum size
of logs
58 cm

Heating
surface
50 to 110 m²

Power
range
6 to 13,5 kW

Optimum
power
9 kW
= 3 kg wood / hour

Maximum size
of logs
58 cm


KAZAN GA

This 100% cast iron stove, enhanced by its graphic lines and large glass surface offers a wide angle view. Kazan GA gives pride of place to the beauty of fire. Its design and performance won't fail to bring a warm atmosphere into your home. Design: Bernard Dequet.



Anthracite
Ref. 6104-43

W 652 X H 801 X D 372 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p120)





Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
60 cm

SIAM

A sober and elegant stove that delivers powerful performance. Its retro, yet sleek look will seduce traditional stove lovers. Design: Bernard Dequet.



Anthracite
Ref. 9170-44

W 700 X H 803 X D 451 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p121)



POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹³⁾
Warranty

SEDAN L

SIDE LOADING

The retro style of the Sedan L wood stove fits perfectly in a warm and friendly setting. As for convenience, it can be loaded with logs from the side. Design: Jean-Philippe Dargenton.

W 766 X H 770 X D 523 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p121)



Heating surface
65 to 145 m²

Power range
8 to 18 kW

Optimum power
12 kW
= 4 kg wood / hour

Maximum size of logs
60 cm



Anthracite
Ref. 9172-44



Ivory enamel
Ref. 9172-46



Grey enamel
Ref. 9172-48



SEDAN M

SIDE LOADING

Classic and timeless with its side loading feature, the Sedan M stove renews itself in trendy enamelled colours. Design: Jean-Philippe Dargenton.

W 644 X H 701 X D 463 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p121)



Heating surface
55 to 120 m²

Power range
6,5 to 15 kW

Optimum power
10 kW
= 3.3 kg wood / hour

Maximum size of logs
42 cm



Anthracite
Ref. 9160-44




Ivory enamel
Ref. 9160-46



Red enamel
Ref. 9160-47



Grey enamel
Ref. 9160-48



RÉGENT

The traditional look of this stove creates a feel-good atmosphere in your room. Design: Jean-Philippe Dargent.

W 764 X H 736 X D 480 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p121)



Anthracite
Ref. 9174-44



Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
50 cm

MAIRY

This all cast-iron stove launch yourself with ardor into an universe of comfort and energetic performance. Design: Jean-Philippe Dargent.

W 524 X H 1098 X D 426,5 mm

Flue diameter 150 mm. Top flue.

(Comparative tables: p121)



Anthracite
Ref. 6145-44



Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
40 cm



CASSINE

Its simple design and vertical lines make the Cassine an indispensable stove to pleasantly warm your home. Design: Jean-Philippe Dargenton.



Anthracite
Ref. 6147-44

W 513 X H 977 X D 415 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p121)



Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
40 cm





Heating
surface
50 to 110 m²

Power
range
6 to 13,5 kW

Optimum
power
9 kW
= 3 kg wood / hour

Maximum size
of logs
54 cm

BRADFORD

With its classical and modern lines, Bradford reveals a timeless style without a blush. It melts into your interior in anthracite or enamelled ivory color, or distinguishes itself with its dynamic red enamel color.



W 730 X H 690 X D 613 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p121)

made in
france
ISO 14001 CERTIFIED



Anthracite
Ref. 9173-44



Ivory enamel
Ref. 9173-46



Red enamel
Ref. 9173-47

POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹⁰⁾
Warranty

MODENA

This wood stove with a retro spirit fits perfectly in a warm and friendly context. Beyond its energy and environmental performance, Modena impresses with its wide range of enamel colours: red, yellow, ivory, and a very trendy grey. Design: Jean-Philippe Dargent.



W 764 X H 741 X D 508 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p121)

made in
france
ISO 14001 CERTIFIED



Anthracite
Ref. 9175-44

Ivory enamel
Ref. 9175-46

Grey enamel
Ref. 9175-48

Red enamel
Ref. 9175-47

Yellow enamel
Ref. 9175-45

POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹⁰⁾
Warranty

Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
50 cm



FIFTY ON PEDESTAL

The spirit of fantasy and joy are invited in your home with this vintage wood stove, available in several colours. Inspired by the aesthetic of the 50s, Fifty arche also transports you to the future thanks to high performance. Design: Jean-Philippe Dargenton.

Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
60 cm



W 922 X H 850 X D 442 mm
Flue diameter 150 mm. Top flue or rear flue.
(Comparative tables: p121)



Anthracite
Ref. 6480-44



Ivory enamel door
Ref. 6480-46



Red enamel door
Ref. 6480-47







Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
40 cm


TIPI

The great and sacred spirit of fire emanates from this stove. Its design is widely inspired by the traditional house of native Americans. Simple and slender, this all-cast iron stove works perfectly with doors opened to celebrate the cult of the fire. During cold days, the Tipi is a tremendous renewable source of heat. Design: Bernard Dequet.



Anthracite
Ref. 6153-44

W 1585 X diameter on floor 754 mm
Flue diameter 200 mm. Top flue.
(Comparative tables: p122)



CHAMANE 10



Anthracite
Ref. 6156-14

Excellent performance for this stove soberly dressed in anthracite; that takes up minimal space, showing a maximum of fire! Its elongated lines and balanced dimensions highlight its innovative design. Design: Bernard Dequet.

W 560 X H 1200 X D 578 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p122)
Available in 14 kW version p.89



Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
40 cm



SÉVILLE 2

Enamelled or anthracite, the Seville stove brings a touch of aestheticism your home and gives your room a warm and cosy character. Design: Jean-Philippe Dargent.



W 560 X H 692 X D 462,5 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p122)



Anthracite
Ref. 6192-44



Ivory enamel
Ref. 6192-46



Red enamel
Ref. 6192-47







Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
33 cm

OVE

Do you feel like lounging around a fire or curling up on your couch ? Ove is perfect to create a cozy corner in your home. Irresistible design, power of seduction, Ove also offers high performances and cares of the environment. Design: Bernard Dequet.



Anthracite
Ref. 6149-44

H 1310 X diameter on floor 550 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p122)



LUNA





Welcome to a universe of high energetic performance ! With its 3 stylish-formed feet Luna seeks to heat all living spaces. Design: Bernard Dequet.



W 833 X H 810 X D 457 mm
Flue diameter 180 mm.
Top flue or rear flue.
(Comparative tables: p122)

made in
france
ISO 14001 CERTIFIED



	
Black enamel Ref. 6182-43	Ivory enamel Ref. 6182-46
	
Anthracite Ref. 6182-44	Red enamel Ref. 6182-47

POST
COMBUSTION

100%
CAST-
IRON

5-YEAR[®]
Warranty



Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
52 cm

ANTAYA

Allow yourself to be captivated by the magic of Antaya. This wide screen stove brings amazing performance and style.
Design: Bernard Dequet.

W 1051 X H 899 X D 480 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p122)



Anthracite
Ref. 6114-44



Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
71 cm

Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
71 cm



THÉIA

Flamboyant actor, Théia stove delivers an original interpretation of the dance of fire in your home. Design: Bernard Dequet.



Anthracite
Ref. 6113-44

W 1034 X H 913 X D 491 mm
Flue diameter 180 mm.
Top flue or rear flue.
(Comparative tables: p122)

made in
france
ISO 14001 CERTIFIED



POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹⁵⁾
Warranty

GAYA ARDOISE

Sink into your armchair and enjoy the great show displayed by the stove Gaya ardoise. Design: Bernard Dequet.

W 1200 X H 1143 X D 503 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p123)



Anthracite
Ref. 6117-44




Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
71 cm



AKAN

Thanks to Akan stove, have an appointment with relaxation and serenity. The decorative doors capture the light. Design: Bernard Dequet.

W 1034 X H 913 X D 491 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p122)



Anthracite
Ref. 6111-44




Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
71 cm



ITAYA

An exceptional design, the Itaya stove creates a unique and warm atmosphere in your home.
Design: Bernard Dequet.

W 1051 X H 846 X D 431 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p123)



Anthracite
Ref. 6110-44




Heating surface
65 to 145 m²

Power range
8 to 18 kW

Optimum power
12 kW
= 4 kg wood / hour

Maximum size of logs
71 cm



SYMPHONIA

Indulge your senses with Symphonia. The hypnotic dance of the flames will extend on the decorative doors of the wood stove. An authentic design which also demonstrates high performances. Design: Bernard Dequet.

W 1034 X H 913 X D 491 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p123)



Anthracite
Ref. 6115-44




Heating surface
65 to 145 m²

Power range
8 to 18 kW

Optimum power
12 kW
= 4 kg wood / hour

Maximum size of logs
71 cm



ONYX

A distinctive design in harmony with materials. The white steel surround contrasts with the natural and mineral aspect of the anthracite cast-iron. Onyx can handle large logs and offers a fantastic view of the fire. Design: Bernard Dequet.



W 1650 X H 1150 X D 537 mm
Flue diameter 180 mm. Top flue or rear flue.
(Comparative tables: p123)

Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
71 cm



Steel surround
White epoxy
Ref. 6120-46







Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
80 cm

NELSON

DOUBLE SIDED VIEW

This double sided stove gives a unique character to your home. Pleasant evenings ahead, at each side of the stove, the rhythm of the crackling fire and dance of the flames are now unmissable. Design: Jean-Philippe Dargenton

W 910 X H 955 X D 480 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p123)



Anthracite
Ref. 6129-44



100%
CAST-
IRON

5-YEAR⁽¹⁾
Warranty

AARON

DOUBLE SIDED VIEW

You no longer need to choose one side or the other. Aaron stove offers a double sided view of the fire. Placed directly on natural material such as stone or a bench, offered as an option, this wide vision welcomes large logs. Design: Jean-Philippe Dargenton.



Anthracite
Ref. 6129-04



Bench option. Ref. 6961-31
W 1000 x H 450 x D 550 mm



Bench option. Ref. 6961-28
W 1600 x H 450 x D 550 mm

W 910 X H 635 X D 481 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p123)



100%
CAST-
IRON

5-YEAR⁽¹⁰⁾
Warranty

Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
80 cm



ELTON

Simple, modern, Elton is an efficient stove. It offers a perfect view of the fascinating interplay of flames and welcomes large logs. Design: Jean-Philippe Dargent.

W 910 X H 956 X D 480 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p123)



Anthracite
Ref. 6127-44



Heating
surface
75 to 170 m²

Power
range
9,5 to 21 kW

Optimum
power
14 kW
= 4.6 kg wood / hour

Maximum size
of logs
80 cm

Heating
surface
75 to 170 m²

Power
range
9,5 to 21 kW

Optimum
power
14 kW
= 4.6 kg wood / hour

Maximum size
of logs
80 cm



PRESTON

The Preston stove displays modernity and simplicity. With its rectangular shape, it can easily be placed on a stone surface or on one of the two optional black steel benches. Design: Jean-Philippe Dargenton.



Bench option. Ref. 6961-31
W 1000 x H 450 x D 550 mm



Bench option. Ref. 6961-28
W 1600 x H 450 x D 550 mm

W 910 X H 636 X D 468 mm
Flue diameter 180 mm.
Top flue or rear flue.
(Comparative tables: p123)

made in
france
ISO 14001 CERTIFIED



Anthracite
Ref. 6128-04

POST
COMBUSTION

100%
CAST-
IRON

5-YEAR⁽¹³⁾
Warranty



Heating
surface
55 to 120 m²

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
44 cm

PRÉSAGE 10

Allow yourself to be captivated by Presage stove. Its decorative door enhances the magic dimension of the flames. On air : viewing pleasure and maximum confort. Design: Bernard Dequet.



Anthracite
Ref. 9159-44

W 560 X H 1200 X D 578 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p123)



ORACLE 10

Behind its decorative facade, Oracle hides its true colours and displays excellent efficiency. We predict a future of comfort and high performance. Design: Bernard Dequet.




Heating surface
55 to 120 m²

Power range
6,5 to 15 kW

Optimum power
10 kW
= 3.3 kg wood / hour

Maximum size of logs
44 cm

W 560 X H 1200 X D 578 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p123)



Anthracite
Ref. 9157-44

CHAMANE 14

Chamane takes up minimal space but offers plenty of fire! Its elongated lines and balanced proportions highlight its innovative design. Design: Bernard Dequet.




Heating surface
75 to 170 m²

Power range
9,5 to 21 kW

Optimum power
14 kW
= 4.6 kg wood / hour

Maximum size of logs
44 cm

W 560 X H 1200 X D 578 mm
Diamètre buse 180 mm. Top flue.
(Comparative tables: p124)
Available in 10 kW version p.73



Anthracite
Ref. 6156-44



Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
40 cm

PHAROS 360°

Flagship product from Invicta's range, Pharos opens the way to a modern and warm house. Follow the light and discover all the benefits of this swivelling stove. Design: Bernard Dequet.



Anthracite
Ref. 9150-44

W 531.5 X H 1240,5 X D 530 mm
Flue diameter 180 mm. Top flue.

(Comparative tables: p124)

Also available in a fixed version: Alios Ref. 9150-24.



ARGOS

State of the art stove with post-combustion technology, Argos opens a bright way to efficient and pleasant wood heating. Design: Bernard Dequet.



Anthracite
Ref. 9151-44

W 532 X H 1250 X D 444 mm
Flue diameter 180 mm. Top flue.
(Comparative tables: p124)



Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
40 cm





Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
60 cm

MANDOR



Anthracite
Ref. 9180-44

Solid cast-iron, this simple and modern looking stove, offers fantastic performance. Its style and its rounded lines embellish the flame show. Elegant on its 4 cast iron feet, Mandor will seduce lovers of stoves with that discreet charm. Design: Bernard Dequet.

W 852 X H 770 X D 492 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p124)



ANGOR

The rounded forms of Angor wood stove seduce those who are seeking generous and efficient wood heating. Design: Bernard Dequet.



W 820 X H 770 X D 471 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p124)



Anthracite
Ref. 9186-44



Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
60 cm

GOMONT

A resolutely modern stove, Gomont occupies minimal space for maximum comfort. It warms and brightens any interior. Design: Jean-Philippe Dargent.



W 550 X H 1130 X D 447,5 mm

Flue diameter 150 mm. Top flue.

(Comparative tables: p124)



Anthracite
Ref. 6158-44



Heating
surface
65 to 145 m²

Power
range
8 to 18 kW

Optimum
power
12 kW
= 4 kg wood / hour

Maximum size
of logs
45 cm

Steel stoves

With excellent value for money, the Invicta steel stoves combine design and efficiency. The combustion chamber of the steel stoves is usually surrounded with panels which store the heat generated by the combustion of the logs. With their refined design, they are very trendy and blend perfectly into any interior. Invicta has launched a variety of new steel stoves.





ONSEN

WITH SIDE GLASSES

The Onsen allows you to admire the fascinating sight of flames from any angle. Make the most of its efficient and pleasant heat.

W 502,5 X H 1048 X D 518 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p125)



Black
Ref. 6488-14

POST
COMBUSTION

refractory
CONCRETE
BRICKS

5-YEAR⁽¹⁰⁾
Warranty



Heating
surface
30 to 70 m²

Power
range
4 to 9 kW

Optimum
power
6 kW
= 2 kg wood / hour

Maximum size
of logs
40 cm

Heating
surface
30 to 70 m²

Power
range
4 to 9 kW

Optimum
power
6 kW
= 2 kg wood / hour

Maximum size
of logs
40 cm

ONSEN

A heat source whose properties are widely recognised, Onsen envelopes you in an aura of well-being, relaxation, and comfort.



Connectable version
Ref. 6488-11

AIR-TIGHT
STOVE
Compatible RT 2012

W 502,5 X H 1048 X D 518 mm
Flue diameter 150 mm. Top flue.
(Comparative tables: p125)



Black
Ref. 6488-10

POST
COMBUSTION

refractory
CONCRETE
BRICKS

5-YEAR⁽¹⁰⁾
Warranty

AURES

Small and large space benefit from the impressive energy performance of this compact stove, full of warmth and originality.

W 699 X H 734 X D 519 mm

Flue diameter 150 mm. Top flue or rear flue
(Comparative tables: p125)



Black
Ref. 6488-00




Heating
surface
45 to 105 m²

Power
range
5,5 to 13 kW

Optimum
power
8,5 kW
= 2.8 kg wood / hour

Maximum size
of logs
51 cm



SKARA

A stove that blends elegance, with high-grade steel and modern technology. Its hearth has a vermiculite layer to boost its energy efficiency. Its wide-angle glass enhances the spellbinding view of the flames.

W 519 X H 1239 X D 446 mm

Flue diameter 150 mm. Top flue or rear flue.
(Comparative tables: p125)



Black
Ref. 6488-35




Heating
surface
40 to 85 m²

Power
range
4,5 to 10,5 kW

Optimum
power
7 kW
= 2.3 kg wood / hour

Maximum size
of logs
27 cm



Heating
surface

40 to 85 m²

Power
range

4,5 to 10,5 kW

Optimum
power

7 kW

= 2.3 kg wood / hour

Maximum size
of logs

35 cm



NARVIK

With its efficient use of energy resources, Narvik fights a winning battle against the cold and transforms your home into a cosy cocoon.



Black
Ref. 6488-30

W 555 X H 1360 X D 555 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p125)



POST
COMBUSTION

AIR-TIGHT
STOVE
Compatible RT 2012

refractory
CONCRETE
BRICKS

5-YEAR⁽¹⁾
Warranty

Heating
surface
40 to 100 m²

Power
range
5 to 12 kW

Optimum
power
8 kW
= 2.6 kg wood / hour

Maximum size
of logs
51 cm



TANA

An untypical design for an elegant stove standing on a single central support.
The panoramic glass offers a grandstand view of the flames.

W 710 X H 930 X D 510 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p125)



Black
Ref. 6488-20

POST
COMBUSTION

refractory
CONCRETE
BRICKS

5-YEAR⁽¹⁹⁾
Warranty

TANA ON BASE

The outstandingly high performance of the Tana base-mounted stove forecasts a heatwave in your home. Prepare to curl up in front of the fire.

W 710 X H 1145 X D 510 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p125)



Black
Ref. 6488-21




Heating surface
40 to 100 m²

Power range
5 to 12 kW

Optimum power
8 kW
= 2.6 kg wood / hour

Maximum size of logs
51 cm



TANA GA ON BASE

Take the express route to a world of comfort and pleasure. With Tana GA, enjoy the benefit of high energy performance around the splendid panorama that its wide angle glass provides.

W 710 X H 1145 X D 510 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p125)



Black
Ref. 6488-22




Heating surface
40 to 100 m²

Power range
5 to 12 kW

Optimum power
8 kW
= 2.6 kg wood / hour

Maximum size of logs
51 cm



Pellet stoves

Automatic and easy to use, pellet stoves are becoming more common in French households. The pellet stove is different from other wood stoves because it does not use logs, but wood pellets. Modern and easy to use, it is ideal for those who want natural heat without having to store or transport logs. With the front keyboard or remote control, you just have to program it. It will stop automatically when there are no more pellets in the feed hopper. Invicta pellet stoves have been designed to limit noise levels. Extremely efficient, some pellet stoves Invicta offer efficiencies of between 80 and 95%!



Heating
surface

30 to 90 m²

Power
range

3,1 to 7,3 kW

Pellets

Feed hopper: 15 kg



SERINO 7



Black
Ref. 6409-74



Grey
Ref. 6409-78

"A stove that heats really well! But doesn't cost the earth! "

The Serino granules wood stove has numerous advantages: it provides high output at a very affordable cost.



W 470 X H 950 X D 560 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p125)



2-YEAR⁽¹³⁾
Warranty

PHILIA 9E

Born of the union between pellet stove technology and design, the Philia offers a unique warming experience. Enjoy performance and its energy of wellbeing, while contemplating its remarkable cast iron surround.

W 472 X H 988 X D 468 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p125)

CAST IRON
made in

france



Black surround
Cast iron and steel
Ref. 6420-00

2-YEAR⁽¹⁰⁾
Warranty



Heating
surface
40 to 110 m²

Power
range
3,4 to 9 kW

Pellets
Feed hopper: 16,5 kg



UBLO 9E

A perfect balance between technology and design, the Ublo pellet wood-stove offers a unique experience in efficient heating. Make the most of the Ublo's high performance and warm output while enjoying the striking design of its cast-iron casing.

Heating
surface
40 to 110 m²

Power
range
3,4 to 9 kW

Pellets
Feed hopper: 16,5 kg



CAST IRON
made in
france

W 490 X H 985 X D 500 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p126)



Anthracite
Ref. 6420-01

SURROUND
CAST-
IRON

2-YEAR⁽¹³⁾
Warranty

LODI 10

With its rounded shape, this pellet stove in red, black, or grey cannot fail to match your decor. It will bring a uniquely pleasant feeling of well-being to your home. Remote control supplied with the stove.



Heating surface
35 to 120 m²

Power range
2,5 to 10 kW

Pellets
Feed hopper: 16,5 kg

W 585 X H 1125 X D 570 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p126)



Black 10 kW
Ref. 6419-74



Red 10 kW
Ref. 6419-77



Grey 10 kW
Ref. 6419-78



2-YEAR[®]
Warranty

LODI 7



Heating surface
25 to 85 m²

Power range
2,5 to 7 kW

Pellets
Feed hopper: 16,5 kg

W 585 X H 1125 X D 570 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p126)



Black 7 kW
Ref. 6419-64



Red 7 kW
Ref. 6419-67



Grey 7 kW
Ref. 6419-68



2-YEAR[®]
Warranty


NOLA 10

With its sleek style, this pellet stove will fit right into your home, ensuring a unique feeling of well-being.

W 465 X H 1125 X D 500 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p126)
Available in 7 kW version p.22




Red
Ref. 6418-17


Black
Ref. 6418-14


Grey
Ref. 6418-18

2-YEAR⁽¹³⁾
Warranty



Heating
surface
35 to 120 m²

Power
range
2,5 to 10 kW

Pellets
Feed hopper: 16,5 kg

TRATTO 6

In either grey or black, the shapely side panels of the Tratto pellet stove provide a stylish addition to any room. This pellet stove is practical and efficient and transforms your interior space into a cosy nest to relax and unwind.



Heating surface
25 to 70 m²

Power range
2,5 to 6 kW

Pellets
Feed hopper: 16,5 kg

W 540 X H 1010 X D 520 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p126)



Black
Réf. 6412-64



Grey
Réf. 6412-68



2-YEAR[®]
Warranty

TRATTO 9



Heating surface
35 to 110 m²

Power range
2,5 to 9 kW

Pellets
Feed hopper: 16,5 kg

W 540 X H 1010 X D 520 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p126)



Black
Réf. 6412-94



Grey
Réf. 6412-98



2-YEAR[®]
Warranty





Heating
surface

35 to 110 m²

Power
range

2,5 to 9 kW

Pellets

Feed hopper: 16,5 kg

VASTO 9

Thanks to its sober and elegant design and compact size, Vasto is a welcome addition to any type of home. This highly concentrated and efficient stove offers high performance and low environmental impact.

W 465 X H 965 X D 485 mm
Flue diameter 80 mm. Rear flue.
(Comparative tables: p127)



Black
Ref. 6413-94

2-YEAR⁽¹³⁾
Warranty

NOVEDIA 10

The contrast of colours and materials gives an elegant dimension to this pellet stove. The ceramic top in white, ivory or Bordeaux sublimates the black surrounding of this chic pellet stove.



Heating surface
35 to 120 m²

Power range
2,5 to 10 kW

Pellets
Feed hopper: 16,5 kg



2-YEAR¹⁸
Warranty

W 500 X H 1125 X D 500 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p127)

Available until the end of the stock.



Ivory top
ceramic
Ref. 6417-16



White top
ceramic
Ref. 6417-10



Bordeaux top
ceramic
Ref. 6417-17

NOVEDIA 7



Heating surface
25 to 85 m²

Power range
2,5 to 7 kW

Pellets
Feed hopper: 16,5 kg



2-YEAR¹⁸
Warranty

W 500 X H 1125 X D 500 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p127)

Available until the end of the stock.



Ivory top
ceramic
Ref. 6417-76



White top
ceramic
Ref. 6417-70



Bordeaux top
ceramic
Ref. 6417-77

Power
range
6,5 to 15 kW

Optimum
power
10 kW
= 3.3 kg wood / hour

Maximum size
of logs
30 cm



LA ROYALE

WOOD COOKER

The unmistakable look of this cooker harks back to a time of authentic cooking and heating of the kind our great-grandparents knew. Its large capacity oven and its hob with two hotplates made of concentric rings offer a host of cooking possibilities.



W 912 X H 860 X D 655 mm
Flue diameter 150 mm.
Top flue or rear flue.
(Comparative tables: p127)




Black enamel
Ref. 6189-65


1-YEAR⁽¹⁾
Warranty

GLASS PLATES


Shapes of glass floor plates to be installed under your stove. ESG security glass, thickness 6 mm.




Référence
6920-01



Référence
6920-02



Référence
6920-03



Référence
6920-04

WALL PROTECTION PANELS

Reference
6996-80

Dimensions
W 800 x H 960 mm

Thickness
50 mm

Weight
11,6 Kg

Material
Cold rolled steel

Finish
High temperature
epoxy black paint

Screws supplied



Reference
6946-80

Dimensions
W 800 x H 460 mm

Thickness
50 mm

Weight
6 Kg

Material
Cold rolled steel

Finish
High temperature
epoxy black paint

Screws supplied



BENCHES

Reference
6961-28

Dimensions
W 1600 x H 450 x P 550 mm

Material
3 mm steel

Finish
Black epoxy

4 adjustable feet



Reference
6961-31

Dimensions
W 1000 x H 450 x P 550 mm

Material
3 mm steel


Finish
Black epoxy

4 adjustable feet






	6418-74 NOLA 7	6013-84 REMILLY	6102-48 ELO M	6152-44 POW-WOW	6478-44 KAORI	6479-44 FIFTY ARCHE	6453-44 ARATOS
Page	22	23	24-25	26	27	28	29
Designation	PELLET STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
DIMENSIONS AND WEIGHT							
Height	1125	800	880	1895	773	755	1050
Width	465	436	500	Ø817	754	922	527
Depth	500	364	374	Ø817	404	442,5	453
Flue diameter	80	150	150	200	150	150	150
Flue height	210	-	-	-	601	568	-
Log length (cm)	Pellets feed hopper 16,5 kg	34	33	50	58	60	40
Weight (kg)	108	72	110	194	152	176,5	123
HEATING PERFORMANCE							
Optimal heat output (kW) ¹	7	7	5	14	9	10	8
Heat output adjustment ²	2,5 to 7	4,5 to 10,5	3 to 7,5	9,5 to 21	6 to 13,5	6,5 to 15	5 to 12
Efficiency (%) ³	80 to 86	78	75	76	75	76	78
CO level (%) ⁴	0,02 to 0,06	0,10	0,09	0,09	0,1	0,08	0,07
Performance rate ⁵	0,1	0,4	0,5	0,4	0,6	0,5	0,4
Flamme verte ⁶	6 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 ⁷	-	-	✓	-	-	-	-
Autonomy Extended burning ⁸	9 to 27h	8h	8h	8h	8h	8h	8h
Heating volume (m³) ⁹	65/210	100/210	65/150	185/420	125/275	135/300	105/240
Heating surface (m²) ¹⁰	25/85	40/85	25/60	75/170	50/110	55/120	40/100
Post combustion system ¹¹	-	-	✓	✓	✓	✓	✓
Adjustable secondary air ¹²	-	✓	✓	✓	✓	✓	✓
Warranty ¹³	2 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN14785	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Black Red Grey	Anthracite	White enamel	Anthracite	Anthracite	Anthracite Ivory enamel, red	Anthracite

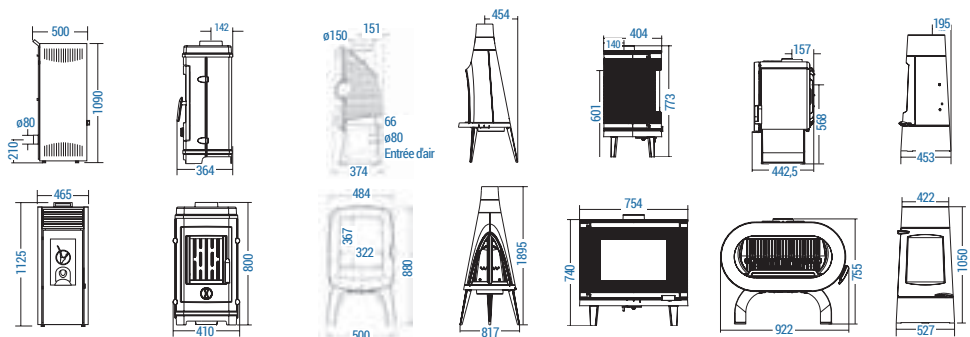






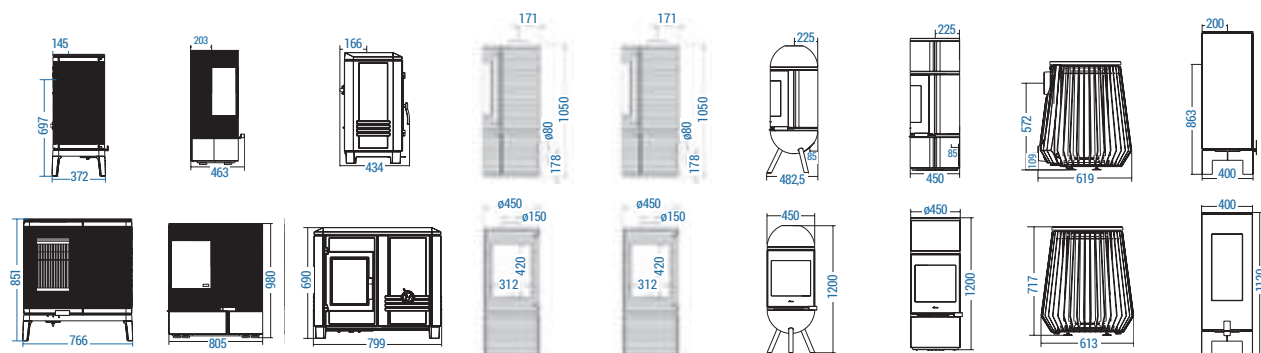



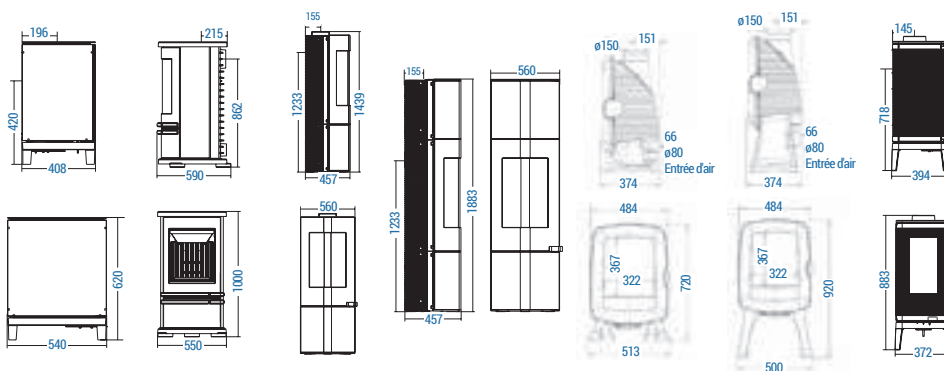


6190-44 AKIMIX	6196-44 MIX	6495-44 CAROLO MIX	6103-44 ALTARA	6103-14 ALTARA +	6109-44 ALCANDE	6107-44 ALCOR	6169-44 İLOT	6122-44 WABI
32-33	34	35	38- 39	38- 39	40	41	42	43
HYBRID STOVE	HYBRID STOVE	HYBRID STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE
851	980	690	1050	1050	1200	1200	716	1120
766	805	799	450	450	450	450	613	400
372	463	434	450	450	482,5	450	619	400
150	150	150	150	150	150	150	150	150
697	-	-	-	-	-	-	572	863
38 or pellets feed hopper 15 kg	38 or pellets feed hopper 11 kg	35 or pellets feed hopper 15 kg	40	40	33	33	30	30
181	252	146	135	141	174	198	160	190
7 pellets 3,5 to 6,5	6 pellets 2,5 to 6,5	7 pellets 3,5 to 6,5	7 4,5 to 10,5	7 4,5 to 10,5	6 4 to 9	6 4 to 9	8 5 to 12	6 4 to 9
76	77	76	79	79	77	77	78	79
0,10	0,08	0,10	0,07	0,07	0,10	0,10	0,04	0,05
0,5	0,6	0,5	0,3	0,3	0,4	0,4	0,2	0,3
7 ★	6 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
-	✓	-	✓	✓	✓	✓	✓	✓
Pellets /wood 8 to 17h / 8h	Pellets /wood 6 to 13h / 8h	Pellets /wood 8 to 17h / 8h	8h	8h	8h	8h	intermittent	8h
95/210	80/180	100/210	100/210	100/210	80/180	80/180	105/240	80/180
40/85	30/70	40/85	40/85	40/85	30/70	30/70	40/100	30/70
✓	✓	✓	✓	✓	✓	✓	-	✓
✓	✓	✓	✓	✓	✓	✓	-	-
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV
Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite






	6131-04 RÉVA	6194-44 ORENSE	6142-44 MOAI	6143-44 MANA	6102-14 ELO S	6102-44 ELO L	6106-44 IWAKI
Page	43	44	45	45	46-47	47	50
Designation	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	DUCTABLE STOVE	CAST IRON STOVE
DIMENSIONS AND WEIGHT							
Height	620	1000	1439	1883	720	920	883
Width	540	550	560	560	513	500	372
Depth	408	590	457	457	374	374	394
Flue diameter	150	150	180	180	150	150	150
Flue height	420	862	1233	1233	-	-	718
Log length (cm)	37	38	35	35	33	33	34
Weight (kg)	155	192	240	300	90	100	118
HEATING PERFORMANCE							
Optimal heat output (kW) ¹	5	8	8	8	5	5	7
Heat output adjustment ²	3 to 7,5	5 to 12	5 to 12	5 to 12	3 to 7,5	3 to 7,5	4,5 to 10,5
Efficiency (%) ³	78	76	77	77	75	75	78
CO level (%) ⁴	0,08	0,13	0,08	0,08	0,09	0,09	0,07
Performance rate ⁵	0,4	0,7	0,4	0,4	0,5	0,5	0,4
Flamme verte ⁶	7 ★	6 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 ⁷	✓	✓	✓	✓	✓	✓	-
Autonomy Extended burning ⁸	8h	8h	8h	8h	8h	8h	8h
Heating volume (m³) ⁹	65/150	105/240	105/240	105/240	65/150	65/150	100/210
Heating surface (m²) ¹⁰	25/60	40/100	40/100	40/100	25/60	25/60	40/85
Post combustion system ¹¹	✓	✓	✓	✓	✓	✓	✓
Adjustable secondary air ¹²	-	-	✓	✓	✓	✓	✓
Warranty ¹³	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Anthracite	Anthracite Chrome handles	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite







								
6106-24 IWAKI ON BASE SIDE GLASSES	6105-44 OKINO	9450-44 SEDAN S	9121-44 NORIK	6123-44 LUDIA	6199-44 MANDRA	6181-48 TENNESSEE	9162-44 CAROLO	6454-44 LA BORNE 2
51	51	52	53	54	55	56-57	58	59
CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
1023	891	627	674	1035	920	798	690	719
360	402	500	620	536	624	780	620	548
372	402	443	465	437	408	428	439	400
150	150	150	150	150	150	180	150	150
858	-	-	500	-	655	604	516	-
34	34	30	50	40	32	54	56	45
140	112	84	104	114	104	170	118	89
7	7	5	6	10	5	8	8	7
4,5 to 10,5	4,5 to 10,5	3 to 7,5	4 to 9	6,5 to 15	3 to 7,5	5 to 12	5 to 12	4,5 to 10,5
78	78	78	78	76	79	76,5	75	78
0,07	0,07	0,07	0,12	0,09	0,09	0,10	0,12	0,12
0,4	0,4	0,3	0,5	0,5	0,4	0,6	0,7	0,5
7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	6 ★	7 ★	7 ★
-	-	-	-	-	-	-	-	-
8h	8h	8h	8h	8h	8h	8h	8h	8h
100/210	100/210	65/150	80/180	135/300	65/150	105/240	105/240	100/210
40/85	40/85	25/60	30/75	55/120	25/60	40/100	40/100	40/85
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240
Anthracite	Anthracite	Anthracite Red enamel, black, grey, ivory	Anthracite	Anthracite	Anthracite	Anthracite White enamel, red, black	Anthracite	Anthracite

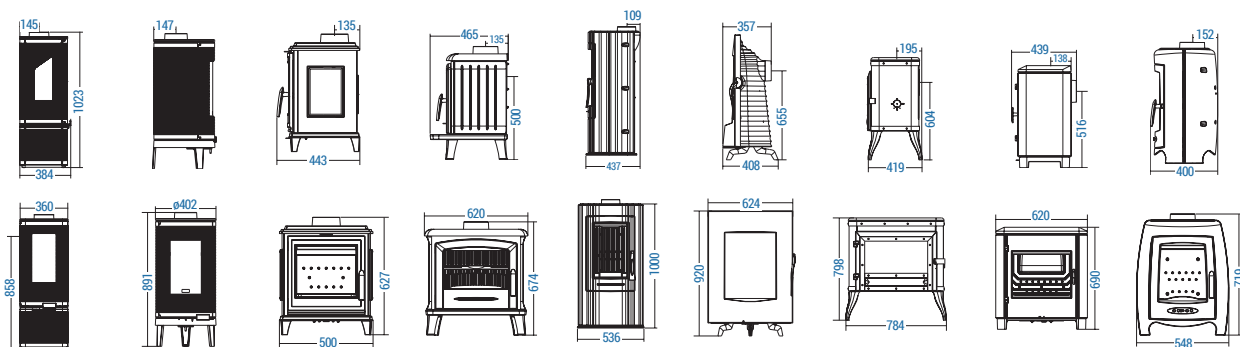

















	6198-44 SOREL	6137-44 CHÂTEL	6136-44 MESNIL	9148-44 SAMARA	9166-44 ALTEA	6104-44 KAZAN	6104-43 KAZAN GA
Page	59	60	60	61	61	62	63
Designation	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
DIMENSIONS AND WEIGHT							
Height	1055	830	986	644	744	801	801
Width	417	476	486,5	634	644	652	652
Depth	517,5	375	385	462	556	372	372
Flue diameter	97	150	150	150	150	150	150
Flue height	938,5	-	-	472	616	636	636
Log length (cm)	65	34	34	50	50	58	58
Weight (kg)	67	80	88	107	133	157	162
HEATING PERFORMANCE							
Optimal heat output (kW) ¹	8	8	8	6	8	9	9
Heat output adjustment ²	5 to 12	5 to 12	5 to 12	4 to 9	5 to 12	6 to 13,5	6 to 13,5
Efficiency (%) ³	75	77	77	78	75	76	76
CO level (%) ⁴	0,29	0,09	0,09	0,12	0,12	0,08	0,08
Performance rate ⁵	1,9	0,4	0,4	0,5	0,7	0,5	0,5
Flamme verte ⁶	-	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 ⁷	-	-	-	-	-	-	-
Autonomy Extended burning ⁸	8h	8h	8h	8h	8h	8h	8h
Heating volume (m ³) ⁹	105/240	105/240	105/240	80/180	105/240	125/275	125/275
Heating surface (m ²) ¹⁰	40/100	40/100	40/100	30/70	40/100	50/110	50/110
Post combustion system ¹¹	-	-	-	✓	✓	✓	✓
Adjustable secondary air ¹²	-	✓	✓	✓	✓	✓	✓
Warranty ¹³	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Anthracite Ivory enamel, blue	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite










9170-44 SIAM	9172-44 SEDAN L	9160-48 SEDAN M	9174-44 RÉGENT	6145-44 MAIRY	6147-44 CASSINE	9173-47 BRADFORD	9175-45 MODENA	6480-44 FIFTY
64	65	65	66	66	67	68	69	70-71
CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
803	770	701	736	1098	977	690	741	850
700	766	644	764	524	513	730	764	922
451	523	463	480	426,5	415	613	508	442
150	180	150	150	150	150	150	150	150
615	616	556	562	-	-	509	562	663
60	60	42	50	40	40	54	50	60
143	164,5	126	170	107	103	175	170	180
12	12	10	10	10	10	9	10	10
8 to 18	8 to 18	6,5 to 15	6,5 to 15	6,5 to 15	6,5 to 15	6 to 13,5	6,5 to 15	6,5 to 15
75	75	75	75	76	76	75	75	76
0,11	0,12	0,12	0,12	0,09	0,09	0,12	0,12	0,08
0,7	0,7	0,7	0,7	0,5	0,5	0,7	0,7	0,5
7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
-	-	-	-	-	-	-	-	-
8h	8h	8h	8h	8h	8h	8h	8h	8h
160/360	160/360	135/300	135/300	135/300	135/300	125/275	135/300	135/300
65/145	65/145	55/120	55/120	55/120	55/120	50/110	55/120	55/120
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240	EN13240	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV
Anthracite	Anthracite Ivory enamel, grey	Anthracite Ivory enamel, red, grey	Anthracite	Anthracite	Anthracite	Anthracite Ivory enamel, red	Anthracite Yellow enamel, ivory, red, grey	Anthracite Ivory enamel, red






	6153-44 TIPI	6156-14 CHAMANE 10	6192-47 SEVILLE 2	6149-44 OVE	6182-43 LUNA	6114-44 ANTAYA	6113-44 THÉIA 6111-44 AKA
Page	72	73	74-75	76	77	78	79-80
Designation	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
DIMENSIONS AND WEIGHT							
Height	1585	1200	692	1310	810	899	913
Width	Ø 754	560	560	Ø 550	833	1051	1034
Depth	Ø 754	578	462,5	Ø 550	457	480	491
Flue diameter	200	180	150	180	180	180	180
Flue height	-	-	-	-	628	717	717
Log length (cm)	40	40	40	33	52	71	71
Weight (kg)	143	160	99	167	152	188	220
HEATING PERFORMANCE							
Optimal heat output (kW) ¹	10	10	7	10	10	12	12
Heat output adjustment ²	6,5 to 15	6,5 to 15	4,5 to 10,5	6,5 to 15	6,5 to 15	8 to 18	8 to 18
Efficiency (%) ³	78	76	77	76	80	76	76
CO level (%) ⁴	0,05	0,09	0,08	0,07	0,14	0,10	0,10
Performance rate ⁵	0,4	0,5	0,4	0,4	0,5	0,7	0,7
Flamme verte ⁶	7 ★	7 ★	7 ★	7 ★	6 ★	6 ★	6 ★
Ductable Compatible with BBC RT 2012 ⁷	-	-	-	-	-	-	-
Autonomy Extended burning ⁸	8h	8h	8h	8h	8h	8h	8h
Heating volume (m³) ⁹	135/300	135/300	100/210	135/300	135/300	160/360	160/360
Heating surface (m²) ¹⁰	55/120	55/120	40/85	55/120	55/120	65/145	65/145
Post combustion system ¹¹	✓	✓	✓	✓	✓	✓	✓
Adjustable secondary air ¹²	✓	✓	✓	✓	✓	✓	✓
Warranty ¹³	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240 BlmSchV	EN13240	EN13240	EN13240
Finish	Anthracite	Anthracite	Anthracite Ivory enamel, red, black	Anthracite	Anthracite Ivory enamel, red, black	Anthracite	Anthracite














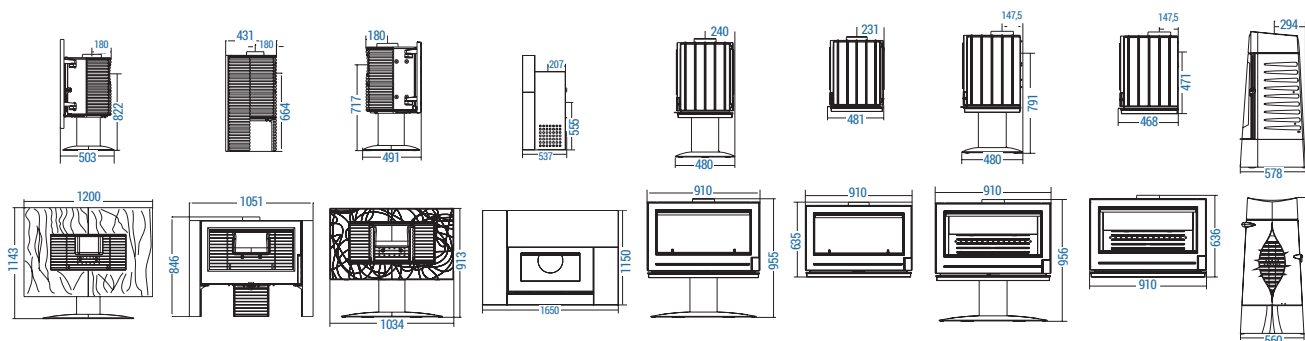







6117-44 GAYA ARDOISE	6110-44 ITAYA	6115-44 SYMPHONIA	6120-46 ONYX	6129-44 NELSON	6129-04 AARON	6127-44 ELTON	6128-04 PRESTON	9159-44 PRÉSAGE 10 9157-44 ORACLE 10
80	81	81	82-83	84	85	86	87	88-89
CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
1143	846	913	1150	955	635	956	636	1200
1200	1051	1034	1650	910	910	910	910	560
503	431	491	537	480	481	480	468	578
180	180	180	180	180	180	180	180	180
822	664	717	555	-	-	791	depending on installation	-
71	71	71	71	80	80	80	80	44
206	187	199	284	201	179	210	179	169/166
12	12	12	12	12	12	14	14	10
8 to 18	8 to 18	8 to 18	8 to 18	8 to 18	8 to 18	9,5 to 21	9,5 to 21	6,5 to 15
76	76	76	76	70	70	75	75	76
0,10	0,10	0,10	0,10	0,15	0,15	0,15	0,15	0,09
0,7	0,7	0,7	0,7	1,2	1,2	0,8	0,8	0,5
6 ★	6 ★	6 ★	6 ★	-	-	6 ★	6 ★	7 ★
-	-	-	-	-	-	-	-	-
8h	8h	8h	8h	intermittent	intermittent	8h	8h	8h
160/360	160/360	160/360	160/360	160/360	160/360	185/425	185/425	135/300
65/145	65/145	65/145	65/145	65/145	65/145	75/170	75/170	55/120
✓	✓	✓	✓	-	-	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240
Anthracite	Anthracite	Anthracite	Steel surround White epoxy	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite




6156-44
CHAMANE 149150-44
PHAROS9151-44
ARGOS9180-44
MANDOR9186-44
ANGOR6158-44
GOMONT6488-14
ONSÉN
SIDE GLASSES

Page	89	90	91	92	93	93	96
Designation	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	STEEL STOVE
DIMENSIONS AND WEIGHT							
Height	1200	1240,5	1250	770	770	1130	1048
Width	560	531,5	532	852	820	550	502,5
Depth	578	530	444	492	471	447,5	518
Flue diameter	180	180	180	150	150	150	150
Flue height	-	-	-	608	608	-	-
Log length (cm)	44	40	40	60	60	45	40
Weight (kg)	160	167,5	169	144	153	128	126
HEATING PERFORMANCE							
Optimal heat output (kW) ¹	14	12	12	12	12	12	6
Heat output adjustment ²	9,5 to 21	8 to 18	8 to 18	8 to 18	8 to 18	8 to 18	4 to 9
Efficiency (%) ³	78,7	75	75	75	75	75	81
CO level (%) ⁴	0,05	0,10	0,10	0,11	0,11	0,10	0,09
Performance rate ⁵	0,5	0,7	0,7	0,7	0,7	0,6	0,4
Flamme verte ⁶	-	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 ⁷	-	-	-	-	-	-	-
Autonomy Extended burning ⁸	8h	8h	8h	8h	8h	8h	8h
Heating volume (m ³) ⁹	185/425	160/360	160/360	160/360	160/360	160/360	80/180
Heating surface (m ²) ¹⁰	75/170	65/145	65/145	65/145	65/145	65/145	30/70
Post combustion system ¹¹	✓	✓	✓	✓	✓	✓	✓
Adjustable secondary air ¹²	✓	✓	✓	✓	✓	✓	✓
Warranty ¹³	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Black




									
6488-10 ONSEN	6488-11 ONSEN DUCTABLE	6488-00 AURES	6488-35 SKARA	6488-30 NARVIK	6488-20 TANA	6488-21 TANA ON BASE 6488-22 TANA GA ON BASE	6409-7X SERINO 7	6420-00 PHILIA 9E	
97	97	98	98	99	100	101	104	105	
STEEL STOVE	STEEL STOVE	STEEL STOVE	STEEL STOVE	STEEL STOVE	STEEL STOVE	STEEL STOVE	PELLET STOVE	PELLET STOVE	
1048	1048	734	1239	1360	930	1145	950	988	
502,5	502,5	699	519	555	710	710	470	472	
518	518	519	446	555	510	510	560	468	
150	150	150	150	150	150	150	80	80	
-	-	590	1108	1215	827	1020	140	235	
40	40	51	27	37	51	51	Pellets feed hopper 15 kg	Pellets feed hopper 16,5 kg	
126	135	85	112	130	107	135	83	134	
6	6	8,5	7	7	8	8	7	9	
4 to 9	4 to 9	5,5 to 13	4,5 to 10,5	4,5 to 10,5	5 to 12	5 to 12	3,1 to 7,3	3,4 to 9	
81	78	77	81,8	79	81	80	87 to 90	87,3	
0,09	0,07	0,09	0,10	0,09	0,06	0,04	0,02 to 0,04	0,016	
0,4	0,4	0,5	0,4	0,5	0,3	0,3	0,1	0,1	
7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	6 ★	7 ★	
-	✓	-	✓	✓	-	✓	-	-	
8h	8h	8h	8h	8h	8h	8h	8 to 21h	7 to 20h	
80/180	80/180	110/255	100/210	100/210	105/240	105/240	75/225	180/275	
30/70	30/70	45/105	40/85	40/85	40/100	40/100	30/90	40/100	
✓	✓	✓	✓	✓	✓	✓	-	-	
✓	✓	✓	✓	✓	✓	✓	-	-	
5 years	5 years	5 years	5 years	5 years	5 years	5 years	2 years	2 years	
EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN14785	EN14785	
Black	Black	Black	Black	Black	Black	Black	Black Grey	Black	

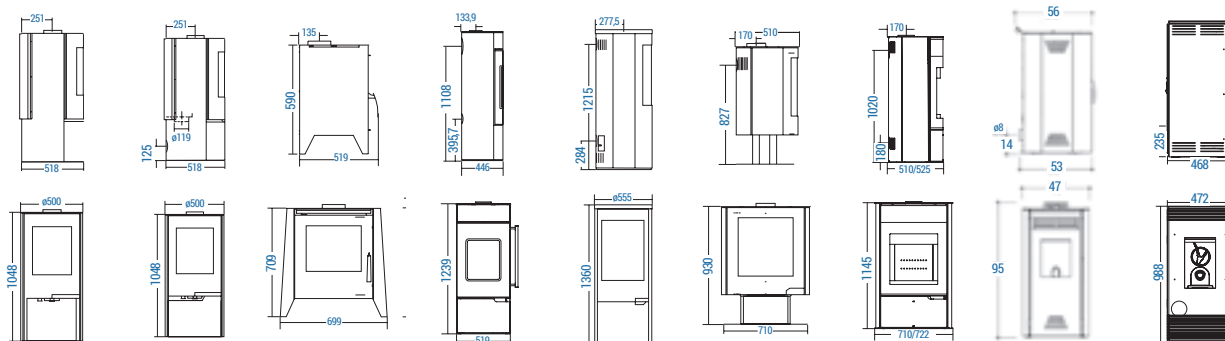



	6420-01 UBLO 9E	6419-7X LODI 10	6419-6X LODI 7	6418-1X NOLA 10	6412-6X TRATTO 6	6412-9X TRATTO 9	6413-94 VASTO 9
Page	106-107	108	108	109	110	110	112
Designation	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE
DIMENSIONS AND WEIGHT							
Height	985	1125	1125	1125	1010	1010	965
Width	490	585	585	465	540	540	465
Depth	500	570	570	500	520	520	485
Flue diameter	80	80	80	80	80	80	80
Flue height	235	210	210	210	215	215	215
Log length (cm)	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg
Weight (kg)	134	108	108	108	85	85	85
HEATING PERFORMANCE							
Optimal heat output (kW) ¹	9	10	7	10	6	9	9
Heat output adjustment ²	3,4 to 9	2,5 to 10	2,5 to 7	2,5 to 10	2,5 to 6	2,5 to 9	2,5 to 9
Efficiency (%) ³	87,3	80 to 86	80 to 86	80 to 86	87 to 90	87 to 90	87 to 90
CO level (%) ⁴	0,016	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06
Performance rate ⁵	0,1	0,1	0,1	0,1	0,1	0,1	0,1
Flamme verte ⁶	7 ★	6 ★	6 ★	6 ★	6 ★	6 ★	6 ★
Ductable Compatible with BBC RT 2012 ⁷	-	-	-	-	-	-	-
Autonomy Extended burning ⁸	7 to 20h	7 to 27h	9 to 27h	7 to 27h	11 to 27h	7 to 27h	7 to 27h
Heating volume (m ³) ⁹	100/275	85/300	65/210	85/300	65/180	85/275	85/275
Heating surface (m ²) ¹⁰	40/110	35/120	25/85	35/120	25/70	35/110	35/110
Post combustion system ¹¹	-	-	-	-	-	-	-
Adjustable secondary air ¹²	-	-	-	-	-	-	-
Warranty ¹³	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Standard	EN14785	EN14785	EN14785	EN14785	EN14785	EN14785	EN14785
Finish	Anthracite	Black Red Grey	Black Red Grey	Black Red Grey	Black Grey	Black Grey	Black

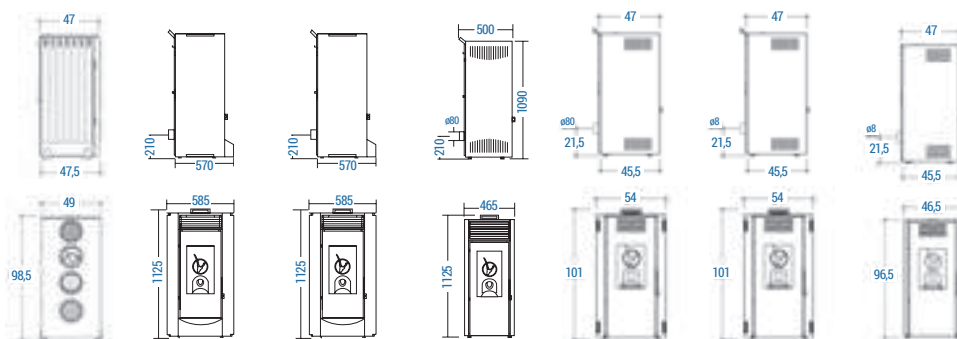



6417-1X NOVEDIA 10	6417-7X NOVEDIA 7	6189-65 LA ROYALE
113	113	114
PELLET STOVE	PELLET STOVE	WOOD COOKER
1125	1125	860
500	500	912
500	500	655
80	80	150
210	210	650
Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	30
108	108	200
10	7	10
2,5 to 10	2,5 to 7	6,5 to 15
≥ 80	≥ 80	77
≤ 0,06	≤ 0,06	0,28
≤ 1	≤ 1	1,8
5 ★	5 ★	-
-	-	-
7 to 27h	9 to 27h	intermittent
85/300	65/210	135/300
35/120	25/85	55/120
-	-	-
-	-	✓
2 years	2 years	1 year
EN14785	EN14785	EN12815
Ivory Bordeaux White	Ivory Bordeaux White	Black enamel

1. Measured in kW, the optimum or nominal heat output is the average heat delivered to the user at normal burning rate, while providing necessary wood. It can be directly compared to nominal output delivered by other heating systems or energies.

2. Possibility of adjusting heat output to your house or room requirements. The minimum heat output indicated corresponds to the reduced burning rate. Wood combustion speed varies during the 1 hour lab test. The maximal heat output is observed during a quarter hour at the peak activity of the fire (highest burning rate).

3. Tells how much of the energy in the wood will be given in the room / house when you use a firebox. Highest efficiency will allow you to decrease wood consumption.

4. CO level: Carbon monoxide is a gas produced by incomplete combustion of wood. CO level is the main indicator of combustion cleanliness.

5. Energy performance rate measured from 3 criteria: efficiency, CO level, dust emissions.

6. Flamme verte: this quality chart guarantees a minimum of 70% efficiency and a CO emission lower than 0,3%. Environmental performances rating (5 to 7 stars).

7. Air-tight stove with possible connection of air supply. Compatible with sustainable houses / centralized fresh air supply from the duct:

- No outside air passage in the room
- Possibility to connect an air supply duct drawing fresh air from the outside or crawl space.

8. Autonomy : number of hours, a pellet stove can operate without reloading the feed-hopper with pellets. It depends on the use at the nominal or reduced power and on the capacity of the feed-hopper.

The extended burning guarantees that the stove will continue to operate at a reduced burning rate during a minimum period of time without any log supply. The embers will last over this period.

9. Indicative heating volume. This data depends on many factors such as house insulation or lay out, altitude and region where you are living.




10. Indicative heating surface (with a 2,50 m room height).

11. Injection of pre-heated air into the combustion chamber. The additional air arrival by the back of the firebox enables re-lighting of combustion residues, dust and hydrocarbon thus obtaining a complete combustion and a reduced pollution emission.

12. The secondary air circulates along the glass and protects it from the soot and smoke. It burns off volatile substances. The possibility of adjusting secondary air allows adaptation of the appliance to excess draught conditions.

13. Terms of the warranty are listed in the stove manual of use.

Registered models. All rights reserved. This document is not contractually binding. Suggestion of presentation. INVICTA reserves the right to modify its models without notice. The weights and dimensions indicated in this catalogue are approximate. Terms of the warranty are listed in the stoves manual of use.





INVICTA

Plus beau. Plus chaud. Moins cher.

ZONE INDUSTRIELLE / LIEU DIT LA GRAVETTE - 08350 DONCHERY - FRANCE

Tél. +33 (0) 3 24 27 71 71 - Fax. +33 (0) 3 24 26 62 42

www.invicta.fr

